

Cisco TelePresence Touch Devices

Product Overview

Cisco TelePresence® Touch devices take ease-of-use and user interaction benefits to the next level by adding touch interfaces to Cisco TelePresence endpoints (Figure 1). These devices are optimized for function, form factor, and ergonomics to offer you easy launch and manageability during a Cisco TelePresence call. The portfolio features 8-, 12-, and 23-inch touch-screen devices:

- Touch 8-inch devices support the Cisco TelePresence System EX Series (EX Series), Cisco TelePresence System Profile Series (Profile Series), Cisco TelePresence MX200), Cisco TelePresence System Integrator C Series (Integrator C Series), and Cisco TelePresence System Quick Set C20 (Quick Set C20).
- Touch 12-inch devices support Cisco TelePresence System 3010 (3010), Cisco TelePresence System 3210 (3210), Cisco TelePresence System 1300 Series (1300 Series), Cisco TelePresence System 1100 (1100), and Cisco TelePresence System 500 Series (500 Series) endpoints.
- The touch 23-inch device supports Cisco TelePresence System T3 (T3).

Figure 1. Cisco TelePresence Touch



Cisco TelePresence Touch devices feature a revolutionary user interface focused on people and how they communicate in one-on-one and group settings. Work environments today demand interactions that are distributed across communication mediums and vary with the changing context, contacts, and content. With Cisco TelePresence Touch devices, you can quickly and easily access the most common tasks in the context of your interaction. The innovative design allows effortless integration with the various forms of synchronous and asynchronous communication that are already part of the workflow.

Features and Benefits

Cisco TelePresence Touch devices enhance the ease of connection and communication by providing instant access to meeting, contacts, directories, and content. These devices enable you to launch and manage calls, share content, and access advanced features - all with a simple touch of the finger:

- Effortless user interaction: Visually appealing and inviting device

- Consistent experience: Unified user interface design (Figure 2)
- Reduced learning curve: Clear, context-based interaction
- Ergonomic fit: Size and form factor optimization for the endpoint use case
- Simple setup: One cable connection to the network
- Easy call launch: One-button-to-push meeting access for scheduled calls and easy-to-access contact list for impromptu usage
- Cohesive collaboration: Ability to select the content you want to share

Figure 2. User Interface Displaying Meeting Information

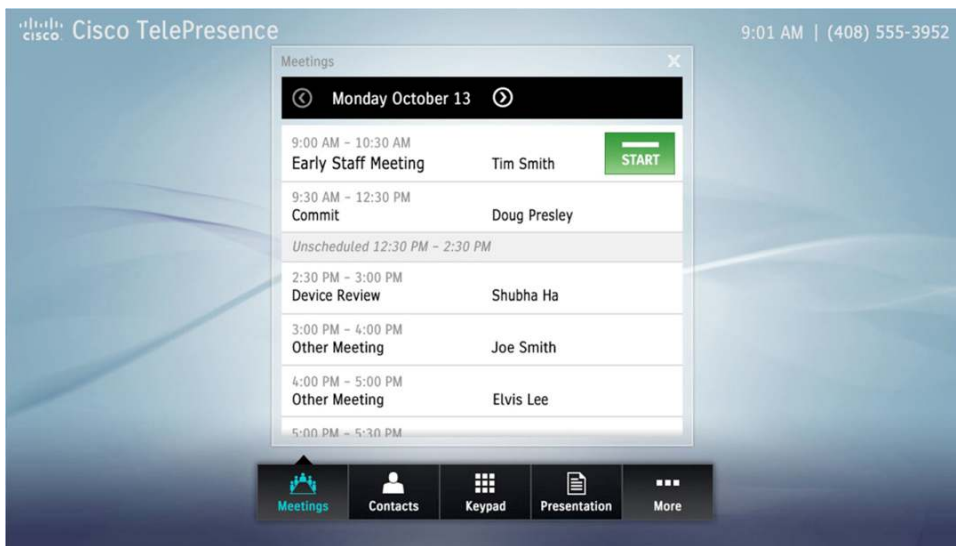


Table 1 gives specifications of the Cisco TelePresence Touch devices.

Table 1. Product Specifications

	Cisco TelePresence Touch 8-inch	Cisco TelePresence Touch 12-inch	Cisco TelePresence Touch 23-inch
Product compatibility	8-inch device (three configurations): <ul style="list-style-type: none"> • EX: for the EX Series products • CS: for the Profile Series, Integrator C Series, and Quick Set C20 • MX200 	12-inch device: <ul style="list-style-type: none"> • Cisco TelePresence System 3010, 3210, 1300, 1100, and 500 Series 	23-inch device: <ul style="list-style-type: none"> • Cisco TelePresence System T3
Software compatibility	For EX: TC3.1 or later For C Series: TC 4.1 or later	Cisco TelePresence System Software Version 1.8 or later	Telepresence Control Unit1.0 or later
Call-control compatibility	Controlled by codec	Cisco® Unified Communications Manager 8.0 or later	TCU and codec
Signaling protocols	TCP/IP		TCP/IP
Display	<ul style="list-style-type: none"> • Capacitive touch LCD • 8-inch diagonal 	<ul style="list-style-type: none"> • Capacitive touch LCD • 11.6-inch diagonal 	<ul style="list-style-type: none"> • Capacitive touch LCD • 23-inch diagonal
Resolution	800 x 480	1366 x 768	1920 x 1080
Connectivity	<ul style="list-style-type: none"> • EX and MX200: Connected through codec • Profile Series, C Series, and Quick Set C Series: Ethernet 	Connected through codec	

	Cisco TelePresence Touch 8-inch	Cisco TelePresence Touch 12-inch	Cisco TelePresence Touch 23-inch
Memory	-	256 MB	-
Language support	English For TC5.0 and later: Finnish, French, German, Japanese, and Russian	English	English
Physical dimensions (H x L x D)	With Handset: 3.0 x 11.4 x 7.4 in. (7.7 x 29.0 x 18.7 cm) Without Handset: 1.7 x 9.0 x 5.7 in. (4.4 x 22.8 x 14.5 cm)	Maximum height when display is at 80° angle: 8.24 x 12.10 x 7.38 in. (20.94 x 30.4 x 18.74 cm) Minimum height when display is at 5° angle: 1.94 x 12.10 x 7.38 in. (4.92 x 30.4 x 18.74 cm)	33 x 55.5 x 4.4 cm
Weight	With Handset: 2.1lb (0.94 kg) Without Handset: 1.4lb (0.64 kg)	4.11 lb (1.866 kg)	Integrated part for T3 table
Power	EX: Power from codec Profile Series, C Series, and Quick Set: Separate power supply MX200: Power from codec	Power over Ethernet (PoE)	Custom power supply
Temperature range	0°C to 35°C (32°F to 95°F)	(5°C to 35°C (41°F to 95°F)	0°C to 35°C (32°F to 95°F)

Warranty Information

Warranty information is available on Cisco.com at the [Product Warranties](#) page.

Ordering Information

Cisco TelePresence Touch devices are available as a part of an endpoint order.

To place an order, visit the [Cisco® Ordering Home Page and refer to Table 2](#). To download software, visit the [Cisco Software Center](#).

Table 2. Ordering Information

See individual endpoint data sheets for whether Cisco TelePresence Touch comes standard with product.

Product Name	Part Number
Cisco TelePresence Touch 8-inch for EX Series	CTS-CTRL-DV8=
Cisco TelePresence Touch 8-inch for C Series, Profile Series, Quick Set C20	CTS-CTRL-DVC8=
Cisco TelePresence Touch 8-inch for MX200	CTS-CTRL-DVP8=
Cisco TelePresence Touch 12-inch for CTS-500-32 and CTS-1300-47	CTS-CTRL-DV12-A=
Cisco TelePresence Touch 12-inch for CTS-1100, CTS-1300-65, CTS-3xxx	CTS-CTRL-DV12-B=
Cisco TelePresence Touch 12-inch for CTS-500 (37")	CTS-CTRL-DV12-C=
Cisco TelePresence Touch 23-inch for T3	CTS-CTRL-DVC23=

Note: Many of the products and features described herein remain in varying stages of development and will be offered on a when-and-if-available basis. This roadmap is subject to change at the sole discretion of Cisco, and Cisco will have no liability for delay in the delivery or failure to deliver any of the products or features set forth in this document.

Cisco Services

Cisco and our partners provide a broad portfolio of smart, personalized services and support that can help you realize the full business value of your Cisco TelePresence investment by increasing business agility and network availability. This portfolio of services accelerates business innovation by harnessing the network as a powerful business platform. For more information about these services, visit:

<http://www.cisco.com/go/telepresenceservices>.

For More Information

For more information about the Cisco TelePresence Touch devices, please visit <http://www.cisco.com/go/telepresence> or contact your local Cisco account representative.



Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

Cisco and the Cisco Logo are trademarks of Cisco Systems, Inc. and/or its affiliates in the U.S. and other countries. A listing of Cisco's trademarks can be found at www.cisco.com/go/trademarks. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1005R)

Printed in USA

C78-646041-01 06/11