

Cisco Expressway Series

Advanced Gateways for Simple and Secure Collaboration

Product Overview

Collaborating with someone should be as simple and secure as a phone call. But often it's not. Tools that enrich interaction such as video and content sharing typically are confined to enterprise locations or to users who are on the same network or using the same kind of application or device. It breaks down when employees leave the office. Or when they reach out to suppliers, customers, or partners who aren't using the same system, network, or device. These barriers force people to use less-productive means such as the phone or email. Meanwhile they miss out on the stronger relationships, faster decision making, and competitive edge that comes with the best forms of collaboration.


Cisco® Expressway Series is an advanced collaboration gateway that helps solve these problems. It works with Cisco Unified Communications Manager, Cisco Business Edition, and Cisco Hosted Collaboration Solution (HCS) to help make collaboration more universal. Main uses for Cisco Expressway Series include:

- **Mobile and remote access:** Cisco Expressway makes collaboration as easy outside the enterprise as it is inside by simplifying the end-user experience. Using secure mobile access based on Transport Layer Security (TLS), Cisco Jabber® mobile users can access all their collaboration workloads (video, voice, content, instant messaging, and presence) without requiring the extra step of a VPN. Cisco Expressway also enables single-sign-on capabilities for Cisco Jabber users, integrating directly with the enterprise authentication and authorization methods in place. Both these capabilities help provide mobile experiences simply from anywhere on a range of devices with Cisco Jabber clients, and complements common IT department BYOD security policies. In addition, teleworkers can use their Cisco endpoints (Cisco TelePresence EX, MX, SX and C Series, Cisco DX Series and Cisco 7800 and 8800 Series), without a VPN, making collaboration at home as easy as in the office.
- **Cisco Jabber Guest support:** Cisco Expressway is integral for enabling the Cisco Jabber Guest. Together, using mobile and browser-based collaboration, the two products enable new ways of securely and easily interacting with "guests," whether they are consumers, other businesses, or even temporary employees.
- **Open video federation:** Cisco Expressway also simplifies external collaboration. Using URI dialing, organizations can securely collaborate with customers, partners, and suppliers and do so as easily as sending an email. No prearrangements needed. They can collaborate with partners or customers just as if they shared an office.

- **Cisco cloud connectivity:** Cisco Expressway also helps people meet more easily. It supports Cisco Collaboration Meeting Rooms, bringing together Cisco's industry-leading collaboration infrastructure and proven, scalable Cisco WebEx® cloud conferencing services to deliver an outstanding meeting experience. Now transparently integrate voice, video, and data sharing for video-optimized meetings available to anyone, anywhere, on any device. Cisco Expressway acts as the gateway connecting on-premises Cisco and third-party systems to the WebEx® cloud.
- **Video interoperability:** If your organization already has third-party video systems, Cisco Expressway can help you migrate to Cisco when you're ready. Cisco Expressway provides video interoperability with standards-based H.323, H.264 SVC, or SIP systems.

Figure 1 illustrates a deployment with Cisco Expressway-C and Expressway-E forming a secure traversal link enabling video, voice, content, and IM&P collaboration outside the firewall. Cisco Expressway works with most firewalls and complements existing security policy, requiring only minimal firewall configuration.

Figure 1. Cisco Expressway Series Deployment

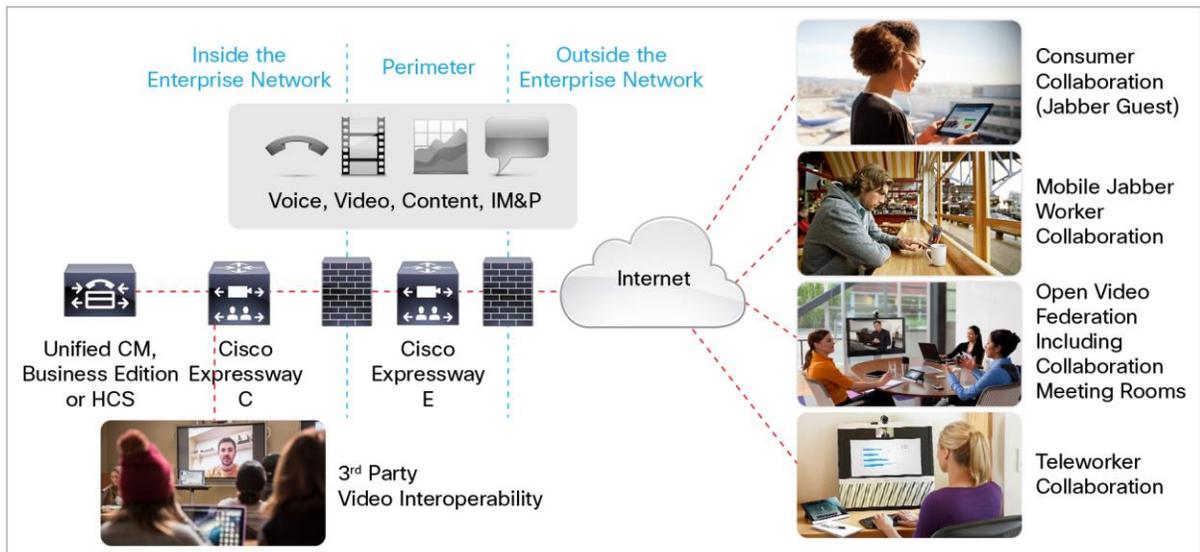

Cisco Expressway Series supports flexible deployment options. It can be deployed on the newest Cisco Expressway CE500 and CE1000 appliances or as a virtualized application for VMware or similar virtual environments.

Features and Benefits of Cisco Expressway Series

- **Increased competitiveness:** Cisco Expressway helps enterprises speed decision making and business processes with real-time video, voice, content, and IM&P collaboration beyond the firewall.
- **Enhanced workforce mobility:** Cisco Expressway embraces mobility and device proliferation trends. It provides simple and secure access for a range of Cisco Jabber unified communications clients, with single-sign-on capabilities and without the need for a separate VPN client, thus complementing common BYOD strategies.
- **Improved productivity and agility:** Cisco Expressway empowers people to collaborate with colleagues, customers, and partners in a more timely and effective manner while helping reduce travel costs.

- **Interoperability:** Cisco Expressway supports open standards, and provides interworking between disparate systems to help enhance return on your existing investments and increase the number of contacts with whom you can connect. Supported standards include IPv4 to IPv6, H.323 to Session Initiation Protocol (SIP), and Microsoft Lync 2013 H.264 SVC to AVC.
- **Flexibility:** Cisco Expressway supports businesses of all sizes as part of a Cisco Business Edition 6000 (BE6000) solution or an enterprise Cisco Unified Communications Manager deployment, or its services can be enabled through the cloud using Cisco HCS.
- **Simplified licensing:** Mobile and remote access using Cisco Expressway is included as part of Cisco Unified Workspace License (UWL) Standard and Pro and Cisco User Connect License (UCL) Enhanced and Enhanced Plus agreements. For Cisco HCS deployments, it is included in Cisco HCS Foundation and Standard license bundles.

Features and Benefits

Table 1 lists features and benefits of Cisco Expressway.

Table 1. Features and Benefits

Feature	Benefit
User Interface	
Web browsers supported	<ul style="list-style-type: none"> • The web interface supports Internet Explorer 8 or 9; Firefox 3 or later; and Chrome.
Management interfaces	<ul style="list-style-type: none"> • Support for industry standards such as HTTP and Secure HTTP (HTTPS), XML, Simple Network Management Protocol (SNMP v1, v2, and v3), Secure Copy Protocol (SCP), and Secure Shell (SSH) Protocol • Embedded setup wizard for initial configuration • Support for call logging and diagnostics • Local time-zone-aware
Language	<ul style="list-style-type: none"> • English, Chinese (Simplified), French, German, Japanese, Korean, Russian, and Spanish
Firewall Traversal	
Traversal services	<ul style="list-style-type: none"> • Cisco Expressway technology • STUN discovery and STUN relay services • Firewall traversal STUN-compliant • H.460.18/19-compliant • H.460.18 client-proxy support • Support for H.460.19 multiplexed media • SIP support
Remote collaboration services supported	<ul style="list-style-type: none"> • XMPP for IM • HTTPS for logon, provisioning and configuration, contact search, and visual voicemail services • SIP for session establishment, register, and invite using Cisco Unified CM Business Edition and Cisco HCS • Real-Time Transfer Protocol (RTP) and Secure RTP (SRTP) for audio and video • Binary Floor Control Protocol (BFCP) for content sharing • Single sign-on for Cisco Jabber 10.6 and later
Network	<ul style="list-style-type: none"> • Support for Domain Name System (DNS) addressing • Support for IPv4 and IPv6 simultaneously • Support for IPv4 and IPv6 translation services
Scalability and Capacity	
Single Cisco Expressway virtual machine capacity (small and medium-size deployments)	<ul style="list-style-type: none"> • The capacity of one Cisco Expressway (small and medium-size virtual machine) follows: <ul style="list-style-type: none"> ◦ Up to 2500 proxied registrations to Cisco Unified Communications Manager ◦ Up to 100 video calls or 200 audio calls
Single Cisco Expressway virtual machine capacity (large deployments)	<ul style="list-style-type: none"> • The capacity of one Cisco Expressway (large virtual machine) follows: <ul style="list-style-type: none"> ◦ Up to 2500 proxied registrations to Cisco Unified Communications Manager ◦ Up to 500 video calls or 1000 audio calls* <p>*Assumes 10-Gbps interface</p>

Feature	Benefit
Cisco Expressway CE500	<ul style="list-style-type: none"> The capacity of one Cisco Expressway CE500 is as follows: <ul style="list-style-type: none"> 1-Gbps network interface Up to 2500 proxied registrations to Cisco Unified Communications Manager Up to 100 video calls or 200 audio calls
Cisco Expressway CE1000	<ul style="list-style-type: none"> The capacity of one Cisco Expressway CE1000 is as follows: <ul style="list-style-type: none"> 1- or 10-Gbps network interface Up to 2500 proxied registrations to Cisco Unified Communications Manager Up to 500 video calls or 1000 audio calls Assumes 10-Gbps interface
Clustered Cisco Expressway capacity	<ul style="list-style-type: none"> Up to 6 Cisco Expressway appliances and virtual machines can be deployed as a cluster to increase capacity and provide redundancy Clustering increases the maximum call capacity by up to 4 times
System Security and Resilience	
Security features	<ul style="list-style-type: none"> Secure management with HTTPS, SSH, and SCP Secure file transfer Inactivity timeout Capability to lock down IP services Authentication required on HTTP(S), SSH, and SCP H.235 authentication support Transport Layer Security (TLS) for SIP signaling Roles-based password-protected GUI user access Capability to enforce strict passwords Capability to disable root access over SSH Automated intrusion protection
Resilience and reliability	<ul style="list-style-type: none"> Capability to deploy Cisco Expressway in a redundant (6) cluster Capability to share licenses across a cluster Capability to replicate configuration for clusters
Supported RFCs	
RFC	<ul style="list-style-type: none"> 2543, 3261, 3264, 1889, 3265, 3325, 3515, 3891, 3892, 2327, 4566, 5626, 5627, 5389, and 5766

Product Specifications for Virtualized Environments

Cisco Expressway can be deployed virtually or as an appliance. Table 2 lists the Cisco Expressway virtualized application specifications.

Table 2. Cisco Expressway Virtualized Application Specifications

Product Feature	Product Specification		
Virtualized Application Specifications			
Servers for virtual environment	<ul style="list-style-type: none"> Cisco UCS® B-Series Blade Servers or C-Series Rack Servers or third-party servers that meet the minimum requirements VMware vSphere or vCenter server running VMware ESXi, which includes Cisco UCS E-Series Servers on Cisco Integrated Services Routers (ISRs) <p>For full details of host requirements, refer to the Cisco Expressway Series virtual machine deployment guide.</p>		
Virtual Machine Host Requirements	Small Deployment (For Cisco BE6000 Platform)	Medium-Size Deployment (Typical Installation)	Large Deployment (Performance and Scalability)
vCPU	2 core	2 core	8 core
Reserved CPU resource	3600 MHz (2 x 1.8 GHz)	4800 MHz (2 x 2.4 GHz)	25600 MHz (8 x 3.20 GHz)
Reserved RAM	4 GB	6 GB	8 GB
Disk space	132 GB	132 GB	132 GB
Network interface card	1 Gbps	1 Gbps	10 Gbps

Product Specifications When Deployed as an Appliance

Cisco Expressway can also be deployed as an appliance on the Cisco Expressway CE500 and CE1000 appliances. Table 3 shows the features and benefits of these appliances, Table 4 lists the specifications, and Table 5 provides standards compliance information.

Table 3. Appliance Features and Benefits

Cisco Expressway CE500 and CE1000 Appliance Features	Benefits
10-Gbps unified network fabric	<ul style="list-style-type: none"> • Low-latency, lossless, 10-Gbps Ethernet
Redundant fans and power supplies	<ul style="list-style-type: none"> • Dual-redundant fans and hot-swappable, redundant power supplies for enterprise-class reliability and uptime • Power efficiency through Cisco Common Form-Factor Platinum power supplies (450W and 650W)
Integrated dual-port Gigabit Ethernet	<ul style="list-style-type: none"> • Outstanding network I/O performance and increased network efficiency and flexibility
Trusted Platform Module (TPM)	<ul style="list-style-type: none"> • TPM is a chip (microcontroller) that can securely store artifacts used to authenticate the platform (server). These artifacts can include passwords, certificates, or encryption keys • TPM can also be used to store platform measurements that help ensure that the platform remains trustworthy, helping ensure authentication and authorization
Tool-free access	<ul style="list-style-type: none"> • Tool-free access to all serviceable items, and color-coded indicators to guide users to hot-pluggable and serviceable items

Table 4. Product Specifications for the Cisco Expressway CE500 and CE1000 Appliances

Item	Platform Specification
Processors	Cisco Expressway CE500: 1 3.30-GHz Intel Xeon processor (E5-2643/130W 4C/10-MB Cache/DDR3 1600 MHz) Cisco Expressway CE1000: 2 3.30-GHz Intel Xeon processors (E5-2643/130W 4C/10-MB Cache/DDR3 1600 MHz)
Memory	Cisco Expressway CE500: 16-GB memory (DDR3-1600-MHz RDIMM/PC3-12800/dual rank/1.35V) Advanced error-correcting code (ECC) Cisco Expressway CE1000: 32-GB memory (DDR3-1600-MHz RDIMM/PC3-12800/dual rank/1.35V) Advanced error-correcting code (ECC)
Network Interfaces	Cisco Expressway CE500: Broadcom 5709 Dual-Port 1 Gbps with TOE iSCSI for Cisco UCS M3 servers Cisco Expressway CE1000: Intel X520 Dual-Port 10-Gbps SFP+ Adapter
RAID Card	Cisco Expressway CE1000 only: RAID 1 configuration, hardware controller (MegaRAID 9271 w/o Supercap, 2 X4 internal SAS connector)
Hard drives	2 1TB SAS 7.2K RPM 3.5-inch HDD/hot plug/drive sled mounted
Cisco UCS Integrated Management Controller	<ul style="list-style-type: none"> • Integrated Emulex Pilot-3 Baseboard Management Controller (BMC) • IPMI 2.0 compliant for management and control • One 10/100/1000 Ethernet out-of-band management interface • CLI and WebGUI management tool for automated, lights-out management • KVM
Front-panel connector	One KVM console connector (supplies 2 USB, 1 VGA, and 1 serial connector)
Front-panel locator LED	Indicator to help direct administrators to specific servers in large data center environments
Additional rear connectors	Additional interfaces including a VGA video port, 2 USB 2.0 ports, an RJ45 serial port, 1 Gigabit Ethernet management port, and dual 1 Gigabit Ethernet ports
Physical dimensions (H x W x D)	1RU: 1.7 x 16.9 x 28.5 in. (4.32 x 43 x 72.4 cm)
Temperature: Operating	32 to 104°F (0 to 40°C) (operating, sea level, no fan fail, no CPU throttling, turbo mode)
Temperature: Nonoperating	-40 to 158°F (-40 to 70°C)
Humidity: Operating	10 to 90% noncondensing
Humidity Nonoperating	5 to 93% noncondensing
Altitude: Operating	0 to 10,000 ft (0 to 3000m); maximum ambient temperature decreases by 1°C per 300m)
Altitude: Nonoperating	0 to 40,000 ft (12,000m)

Table 5. Regulatory Standards Compliance: Safety and EMC for the Cisco Expressway CE500 and CE1000 Appliances

Specification	Description
Safety	<ul style="list-style-type: none">• UL 60950-1 No. 21CFR1040 Second Edition• CAN/CSA-C22.2 No. 60950-1 Second Edition• IEC 60950-1 Second Edition• EN 60950-1 Second Edition• IEC 60950-1 Second Edition• AS/NZS 60950-1• GB4943 2001
EMC: Emissions	<ul style="list-style-type: none">• 47CFR Part 15 (CFR 47) Class A• AS/NZS CISPR22 Class A• CISPR2 2 Class A• EN55022 Class A• ICES003 Class A• VCCI Class A• EN61000-3-2• EN61000-3-3• KN22 Class A• CNS13438 Class A
EMC: Immunity	<ul style="list-style-type: none">• EN55024• CISPR24• EN300386• KN24

Licensing Information

Cisco Expressway Series virtual application software is available at no additional charge to customers who have a license and valid support contract for Cisco Unified Communications Manager Version 9.1.2 or later or for Cisco HCS 9.2.1 or later. Standard and Professional Edition Cisco UWL or Enhanced and Enhanced Plus Cisco UCL agreements support mobile and remote access for Cisco Jabber unified communications clients; Cisco TelePresence System EX Series, Cisco TelePresence MX and SX Series, and Cisco TelePresence Integrator C endpoints; and Cisco DX Series and Cisco IP Phone 7800 and 8800 Series endpoints. Cisco HCS Foundation and Standard license bundles offer similar support for Cisco HCS deployments.

Each concurrent call session terminating on a system not using Cisco Unified Communications Manager or Cisco HCS (for example, B2B calls, Cisco Jabber Guest and Cisco Collaboration Meeting Rooms) requires a Cisco Expressway Rich Media Session license. Also, each concurrent call requiring interworking also requires a Cisco Expressway Rich Media Session license. Examples of such calls include H.323-to-SIP interworked calls and H.264 SVC-to-H.264 AVC calls.

Ordering Information

To order Cisco Expressway, visit the [Cisco Ordering homepage](#) and refer to Table 6.

Table 6. Ordering Information for Cisco Expressway

Product Name	Part Number
Cisco Expressway Series Virtualized Applications	
Cisco Expressway-C Virtual Edition	EXPWY-VE-C-K9
Cisco Expressway-E Virtual Edition	EXPWY-VE-E-K9
Cisco Expressway CE500 Appliance	EXPWY-CE500-BDL-K9
Cisco Expressway CE1000 Appliance	EXPWY-CE1K-BDL-K9
Ordering Options for Cisco Expressway Series	
Cisco Expressway Rich Media Session License (Required for concurrent calls to/from any endpoint or application not registered to Cisco Unified Communications Manager. For example, Business to Business Calls, Cisco Collaboration Meeting Rooms, Jabber Guest and for interworked calls e.g. H.323 to SIP, H.264 AVC to H.264 SVC)	LIC-EXP-RMS
Enhanced Microsoft Collaboration key for Cisco Expressway (Required to enable Microsoft Lync Gateway functionality)	LIC-EXP-MSFT

Service and Support

Cisco offers a wide range of services programs to accelerate customer success. These innovative services programs are delivered through a unique combination of people, processes, tools, and partners, resulting in high levels of customer satisfaction. Cisco Services can help you protect your network investment, optimize network operations, and prepare your network for new applications to extend network intelligence and the power of your business. For more information about Cisco Services, visit [Cisco Technical Support Services](#) online.

For More Information

For more information about the Cisco Expressway Series, please visit <http://www.cisco.com/go/expressway> or contact your local Cisco account representative or authorized Cisco partner. Product specifications are estimates and subject to change without notice.



Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)