



Using LifeSize Systems with Microsoft Office Communications Server 2007

This technical note describes the steps to integrate a LifeSize video communications device with Microsoft Office Communication Server (OCS) 2007 R1 (v3.0.6362.0 or greater) and R2 (v3.5.6907.0 or greater) and Microsoft Office Communicator 2007 R1 (v2.0.6362.0 or greater) and R2 (v3.5.6907.0 or greater).

Note: When using Microsoft Office Communicator 2007 R2, you must modify your client computer system registry if you receive the following error:

“Incompatible security setting
The call could not be completed because security levels do not match”

To modify the registry, complete the following steps:

1. Select **Run** from the **Start** menu.
2. Enter `regedit` and click **OK**.
3. Navigate to
`HKEY_LOCAL_MACHINE\Software\Policies\Microsoft\Communicator`
4. Under `REG_DWORD`, modify `PC2PCAVEncryption` and set the value to `0`.
(This sets Microsoft Communicator to use encryption only if both ends of the call support it).
5. Exit the registry editor and restart the Microsoft Communicator R2.


Refer to technet.microsoft.com for more information about registry settings.

Support for Microsoft OCS is available with software release v4.2 or later for LifeSize video communications systems, and includes support for the Microsoft authentication protocol NT LAN Manager (NTLM) over Transport Layer Security (TLS).

This technical note explains how to add LifeSize systems to your contact list in the Microsoft Office Communicator desktop, so that you can place video calls between the desktop and LifeSize systems. You can also place calls from LifeSize systems to third-party systems within the OCS environment using commonly supported video codecs, such as H.263 and audio codecs, such as G.711. Additionally, you can place calls between LifeSize systems using the high definition H.264 video codec, and AAC-LC audio codec.

Server Setup

This technical note assumes that the Microsoft Office Communications Server is deployed on a separate member server within a Microsoft Windows domain. The Windows domain in this example is *home.com*. The Microsoft OCS is *mocs*. The Active Directory users are on *home.com*.

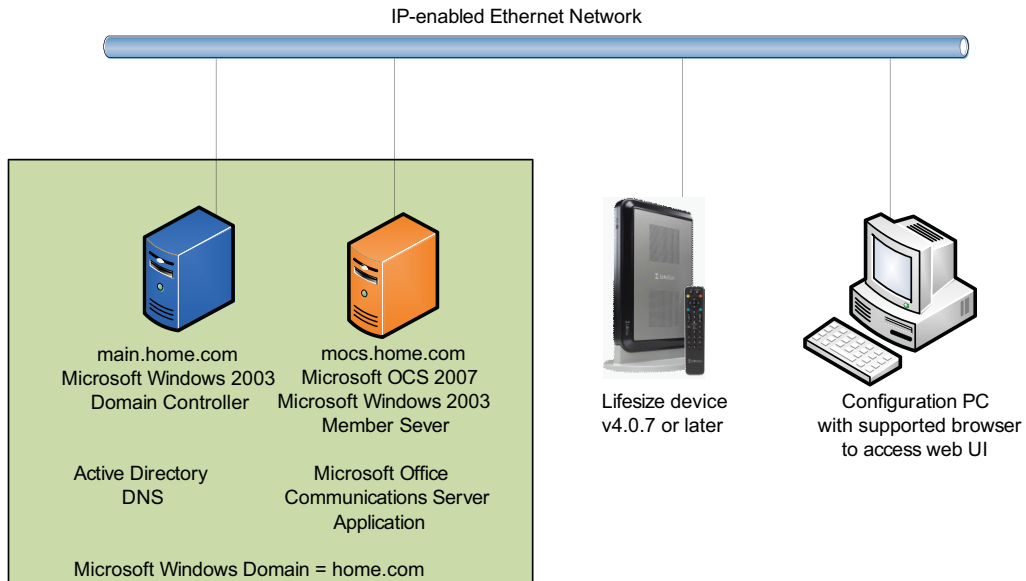


Preparation

Ensure that the LifeSize device can communicate with the Fully Qualified Domain Name (FQDN) of the Microsoft OCS server. Configure the LifeSize device with a DNS server that can resolve the Microsoft OCS FQDN.

To determine if LifeSize can communicate with the Microsoft OCS, access the web administration interface of the LifeSize device.

1. Click the **Diagnostics** tab.
2. Click **Network Utilities**.
3. For **Command**, select **Ping**.
4. In **IP Address**, enter the FQDN of the Microsoft OCS (*mocs.home.com* in this example).
5. Click **Start**.

The following screen shows an example of a LifeSize device about to ping an OCS server called *mocs.home.com*.

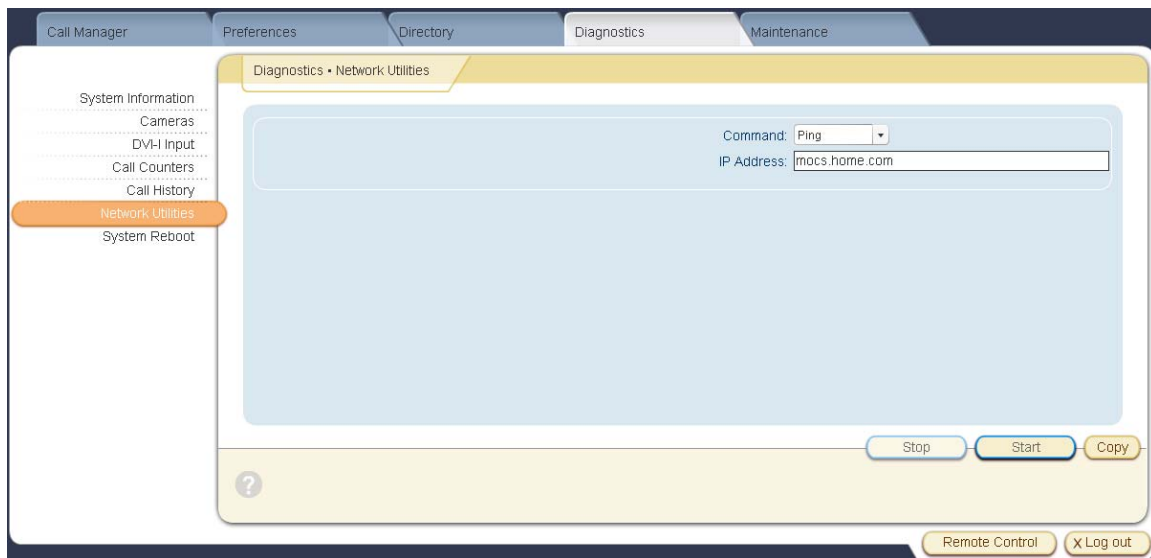


If the ping is not successful, you must resolve this issue before proceeding.

Creating and Configuring an OCS User

Navigate to your domain controller (*home*), and open **Active Directory User and Computers** from **Start>>Administrative Tools**.

1. Right-click the Users directory and select **User** from the **New** submenu.
2. Enter a first name for the LifeSize system (this is how it will appear in other users' contact lists). For example, *LifeSize234*.
3. Enter a **Logon Name**, for example, *LifeSize234*, and select the domain name for the OCS server. For example, the logon name *LifeSize234@home.com*.
4. Click **Next**.
5. Enter a **Password**.
6. Click the **Password Never Expires** check box.
7. Click **Next**.
8. Click **Finish**.

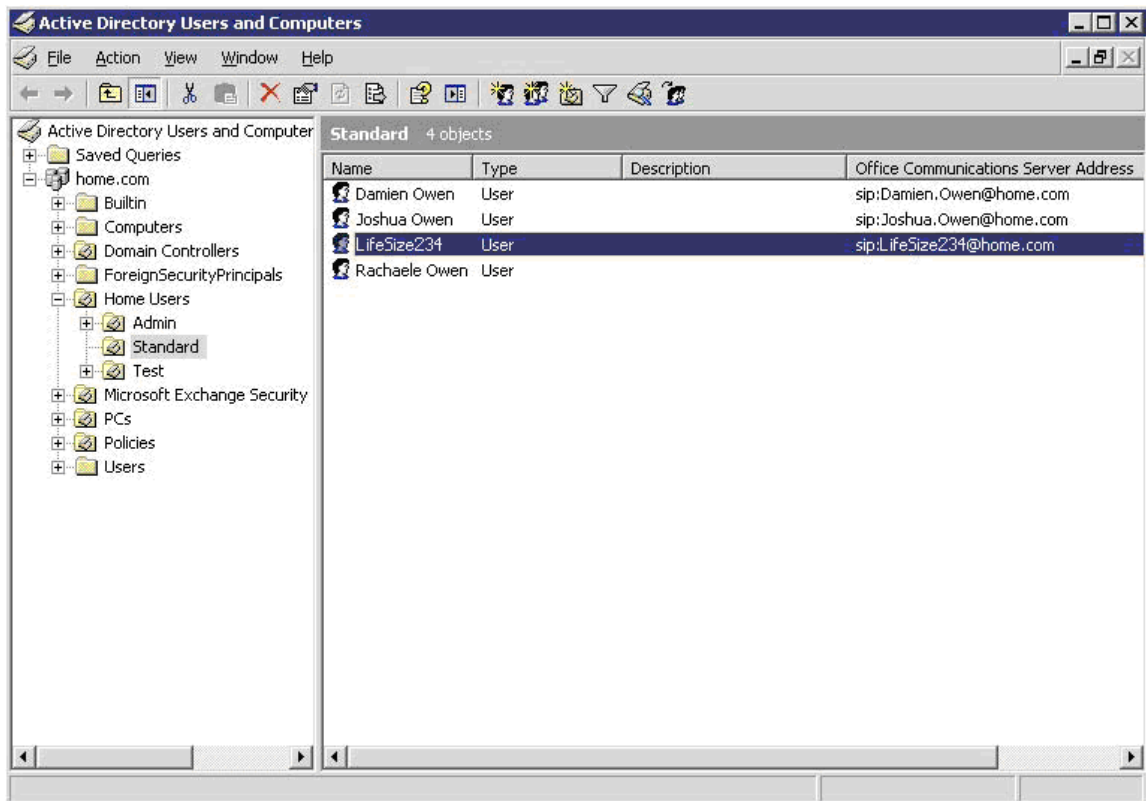


At this point, the user created for the LifeSize device does not display its SIP ID. Close the console for the domain controller (*home*) and navigate to the console for the Microsoft OCS (*mocs*).

Because Microsoft OCS was installed on a member server (*mocs*) and not the domain server (*home*), *mocs* will not list the **Active Directory User and Computers** option under **Start>>Administrative Tools**. Instead, complete the following steps:

1. Click **Start>>Run**.
2. Enter *DSA.MSC*
3. Click **OK**.

These steps run the **Active Directory Users and Computers** plug-in.

1. From the AD Users directory, locate the user you created for the LifeSize device (in this example, *LifeSize234*).
2. Right-click *LifeSize234* and select **Properties**.
3. Select the **Communications** tab.
4. Select the **Enable user for Office Communications Server** check box.
5. Enter the user name in **Sign-in name** (for example, *sip:LifeSize234*). (It may already be populated.)
6. Select the domain name from the drop down list (for example, *home.com*).
7. Select *mocs.home.com* from **Server or pool**.

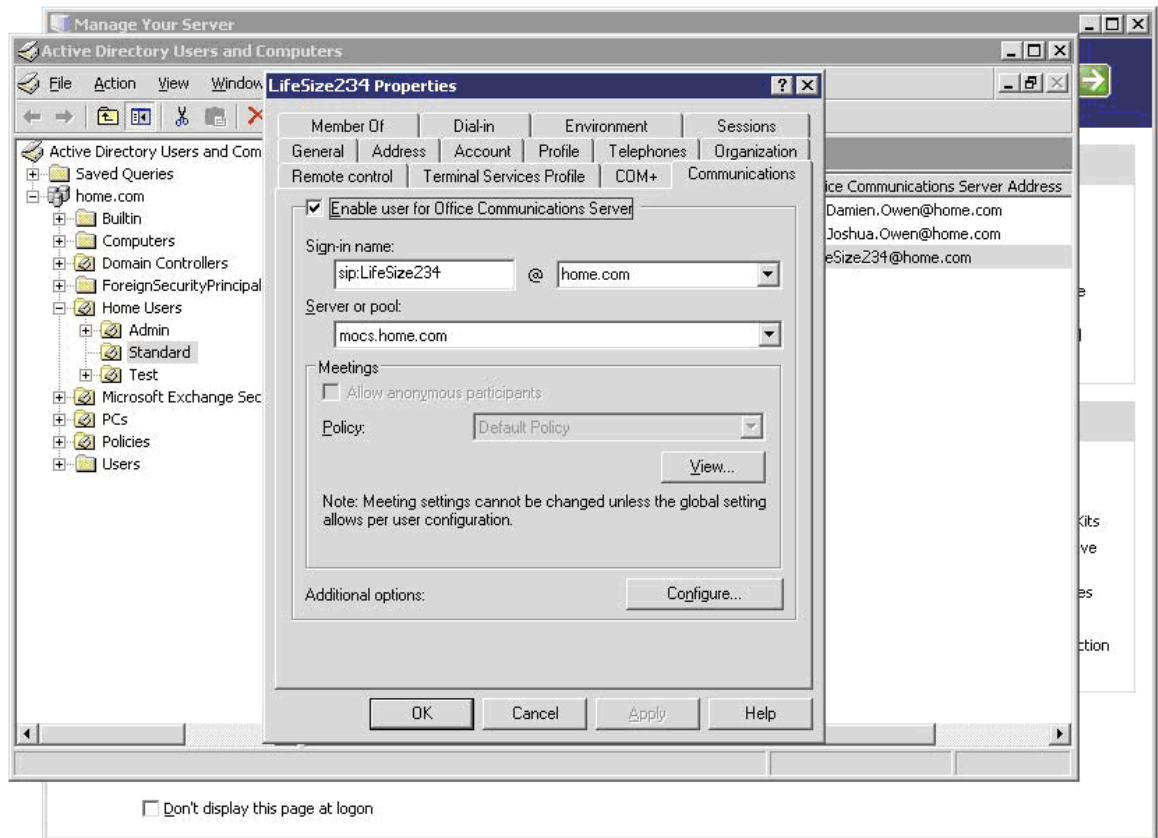

8. Click **OK**.
9. Close the Active Directory console.

Configuring the LifeSize Device Using the Web Administration Interface

Open the web administration interface for the LifeSize device and complete the following steps:

1. Navigate to **Preferences: Communications : SIP**.
2. Verify that **SIP** is set to *Enabled*.
3. Enter the username you created in the Active Directory for **SIP Username** (in this example, *LifeSize234*).
4. Enter the same name for **Authorization Name** (in this example, *LifeSize234*).
5. Enter the **Authorization Password** (the password set up for this user in Active Directory).
6. Set **SIP Server Type** to *Microsoft OCS*.
7. Set **SIP Registration** to *Through Proxy*.
8. Set **SIP Proxy** to *Enabled*.
9. Enter the FQDN of the Microsoft Server in **Proxy Hostname** (in this example, *mocs.home.com*).
10. Ensure that the **Proxy IP Port** is set to *5060*.
11. Set **SIP Registrar** to *Enabled*.
12. Set **Registrar Hostname** to the domain name (in this example, *home.com*).
13. Set **TLS Signaling** to *Enabled*.
14. Ensure that the **TLS Signaling Port** is set to *5061*.
15. Click **Refresh**.
16. Ensure the **Registrar Status** at the top of the page changes to *Registered*.

The screenshot displays the web administration interface for a LifeSize device, specifically the 'SIP' configuration page under 'Communications'. The interface includes a navigation menu on the left with options like 'Call Manager', 'Preferences', 'Directory', 'Diagnostics', and 'Maintenance'. The main content area shows the 'Registrar Status' as 'Registered'. Below this, various SIP settings are listed, including 'SIP' (Enabled), 'SIP Username' (LifeSize234), 'Authorization Name' (LifeSize234), 'Authorization Password' (empty), 'SIP Server Type' (Microsoft OCS), 'SIP Registration' (Through Proxy), 'SIP Proxy' (Enabled), 'Proxy Hostname' (mocs.home.com), 'Proxy IP Port' (5060), 'SIP Registrar' (Enabled), 'Registrar Hostname' (home.com), 'Registrar IP Port' (5060), 'UDP Signaling Port' (5060), 'TCP Signaling' (Enabled), 'TCP Signaling Port' (5060), 'TLS Signaling' (Enabled), and 'TLS Signaling Port' (5061). At the bottom of the configuration area, there are buttons for 'Save Changes', 'Cancel Changes', 'Refresh', and 'Copy'. At the very bottom of the page, there are buttons for 'Remote Control' and 'Log out'.





Adding the LifeSize System to Your Microsoft Office Communicator Contact List

Right click on the **Show Menu** button at the top left of the Communicator window and from the **Tools** submenu, select **Add a Contact**.

1. Click **Next**.
2. Add the user name for the LifeSize system. For example, *LifeSize234@home.com*.

Presence States for LifeSize Devices

LifeSize devices report a subset of Microsoft Office Communicator 2007 presence states as listed in the following table:

Presence Buttons	LifeSize Device Status	Description
	Available	The LifeSize device is online and can participate in calls.
	Busy	The LifeSize device is at its call limit or otherwise cannot receive a call.
	In a call	The LifeSize device is engaged in a call, but can receive additional calls.
	Offline	The LifeSize device is not available.